


WHEELER ROCSTAR

The use of advanced design and state of the art materials, allows Viking-Cives Midwest to produce dump bodies suited for general material hauling, to the most demanding customer applications. Higher strength material translates into lighter body weight, higher strength, and greater carrying capacities, for higher bottom line profit.



Designed to provide maximum payload and maximum durability, overweight saving crossmemberless understructure, and “V” shaped internally reinforced long sills, provide superior floor strength and durability.

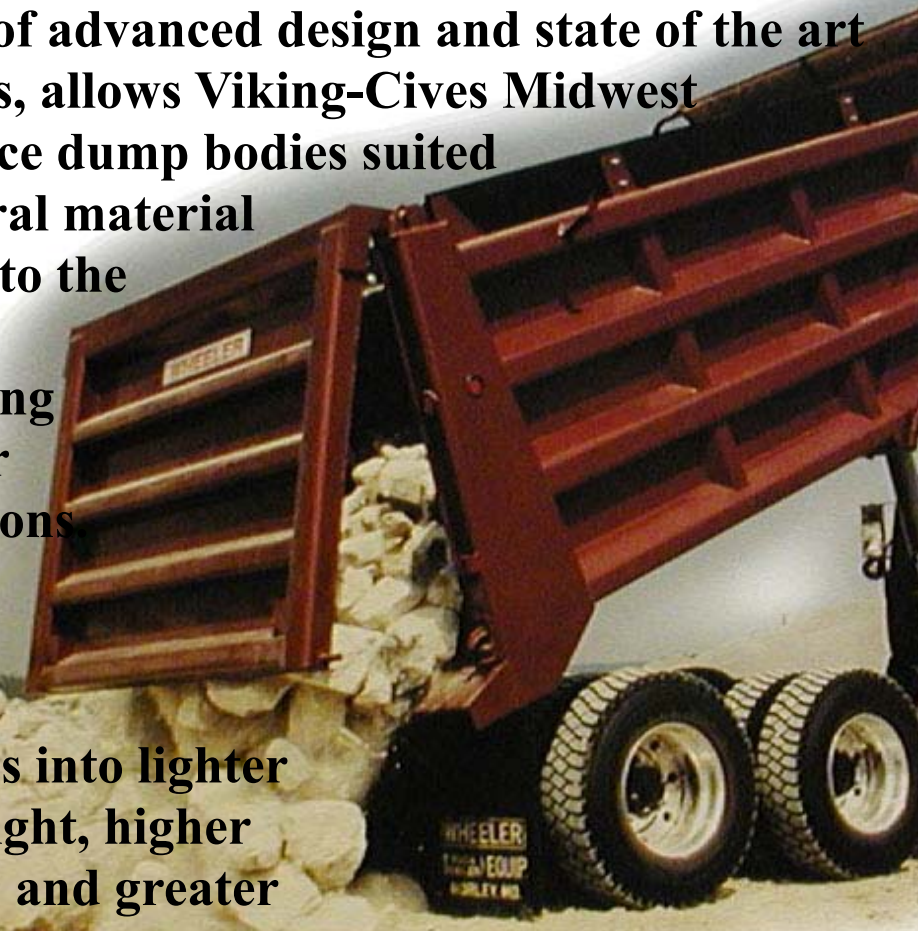

FEATURES & OPTIONS

Standard Features

- Body construction is no less than Grade 65 Hi-Tensile Steel with a minimum yield strength of 70,000 lbs.
- All horizontal body braces are sloped to shed dirt and debris
- Fully boxed top rails with side board pockets
- Massive full depth rear corner posts
- All body bracing is 3/16" Grade 65 Hi-Tensile steel
- Body sides are constructed from one piece steel sheets with NO splices. (Base body sides are 10 Gauge Grade 65 Hi-Tensile steel)
- Full length intermediate horizontal side braces
- Tread plate front corner steps
- Standard 3/16" Grade 65 Hi-Tensile steel floor, with formed return sides, at a 60 Degree angle extending up the side 8" high, provides unsurpassed strength
- Straight hung, fully boxed tailgate with same material as body floor (3/16" Grade 65)
- Tailgate includes air activated lock-release, with manual over ride, fully boxed perimeter bracing, and center dirt shedding horizontal brace(s), overshot gate locks, 1 1/4" top pins, flame cut upper hardware with grease fittings. Upper hardware is flush with the top of the rear corner post.
- Full width rear apron is 3/16" Grade 65 Hi-Tensile steel
- Recessed rubber mounted body marker lights, with (2) oval light provisions in rear posts for stop, turn, back up lights, and sealed wiring harness
- Continuous welding throughout

Base Body Models

LENGTH	MODEL	CAB TO TRUNION	SIDE HEIGHT	TAILGATE HEIGHT	CAPACITY CUBIC YARDS
12'	HT123644	84"	36"	44"	9 to 11.5
13'	HT133644	96"	36"	44"	10 to 12.5
14'	HT144250	102" to 114"	42"	50"	13 to 14.5
15'	HT154250	114" to 126"	42"	50"	14 to 16
16'	HT164250	126" to 138"	42"	50"	15 to 17
17'	HT174250	132" to 150"	48"	56"	18 to 21
18'	HT184850	150" to 162"	48"	56"	19 to 22

Optional Equipment

- Additional side heights and lengths
- Special alloy material for special applications
- Sloping tailgate
- Sideboards, metal or wood
- Corrugated floor
- Side swing tailgate
- Apron
- Heavier gauge deck and sides
- Cabshield various lengths
- Inverted angle on top gate
- Two way gate (std. and side swing)
- Inverted angle on top rail
- Asphalt door
- Push bumper and blocks