



ISO 9001:2000 REGISTERED


Viking Series One Way Plow

The Viking VCL Series One Way Plow is the right choice for high-speed rural and interstate plowing, thanks to its rolled formed moldboard and tubular constructed push frame. Three heavy plate, slotted trip lugs help the moldboard follow road contours closely. Two adjustable trip spring assemblies provide safe tripping action for plowing at all speeds and in varying snow conditions.

To further maximize edge efficiency, the moldboard angle can be precisely adjusted. The adjustable stabilizing arm used for this purpose is shear pin protected to prevent serious plow or vehicle damage should a major obstruction be encountered.

The smooth moldboard helps snow slide by with less friction. Each moldboard is backed with eight 3/8", one-piece ribs for added strength. The two adjustable wear shoe brackets provide proper push frame support.

If you require effective, dependable equipment, go with Viking VCL Series One Way.

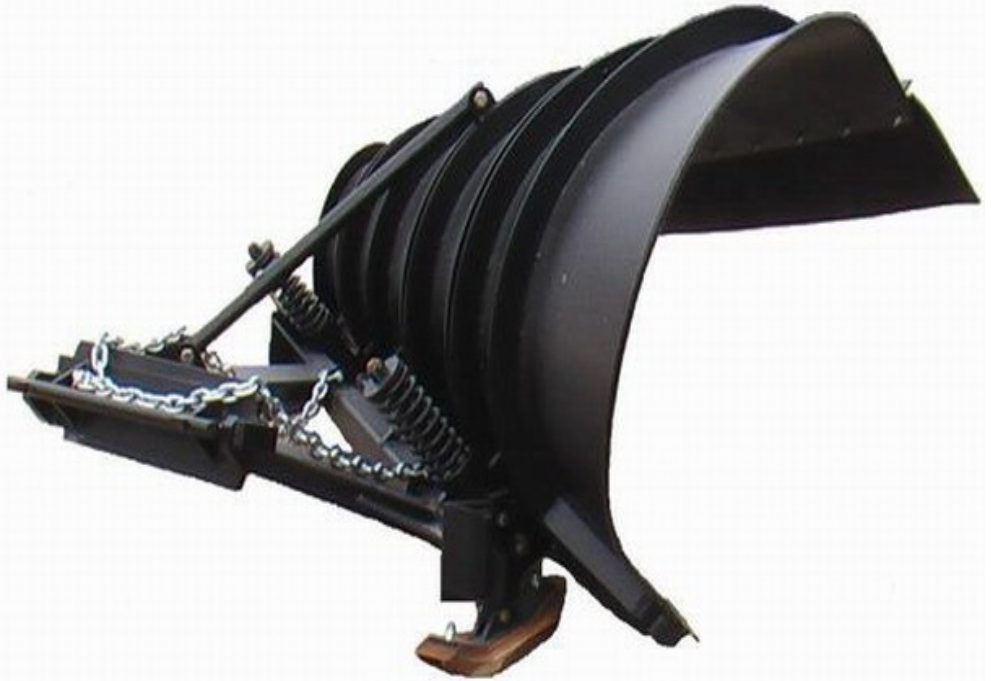

**shown with optional rubber deflector and quick attach swivel

Model	Moldboard	Length of Moldboard	Length of cutting edge	Cutting Width	Height of moldboard at nose end	Height of moldboard at discharge end	Approximate weight of plow & push frame
VCL 110HSE9	10 ga.	13' 10"	11' 4"	108"	16"	34"	1800 lbs.
VCL 120HSE9	10 ga.	13' 10"	11' 4"	108"	26"	54"	2000 lbs.
VCL 120HSE10	10 ga.	14' 9"	12' 4"	120"	26"	56"	2060 lbs.
VCL 135HSE9	10 ga.	14' 4"	11' 4"	108"	35"	64"	2350 lbs
VCL 135HSE10	10 ga.	15' 10"	12' 4"	120"	35"	66"	2450 lbs

Options: Hydraulic power tilt moldboard, screw adjustable shoes, rubber deflector

March 15, 2010



Viking-Cives (USA)
 14331 Mill Street
 Harrisville, NY 13648
 315-543-2321 Phone
 315-543-2366 Fax

Viking-Cives Ltd.
 P.O. Box 1120 RR#4
 Mount Forest, ON N0G 2L0
 519-323-4433 Phone
 519-323-4608 Fax

Viking-Cives Midwest
 P.O. Box 295 22956 Hwy 61
 Morley, MO 63767
 573-262-3545 Phone
 573-262-3540 Fax